

ATKOMATIC

 **CIRCLE SEAL CONTROLS, INC.**
A division of CIRCOR International, Inc.

15-794 Series

**Stainless Steel, Pilot-Piston, 5 to 300 PSIG,
Liquid CO₂ Valve**

Features

- Designed specifically for liquid CO₂
- Pilot operated valve
- Pressure to 350 psig
- 1/2" NPT ports
- C_v of 3.0
- Stainless steel construction
- Teflon® piston (seat material)
- Teflon® body seal
- Coil housing is waterproof and nickel plated
- Class H and class B coils are available
- No other options available

Operational pressures

(5 psid minimum pressure differential)


Liquid Carbon Dioxide	
A.C.	D.C.
350	350

2301 Wardlow Circle, P.O. Box 3300
Corona, California 92878
tel 909-270-6200
fax 909-270-6201
www.circle-seal.com
am_sales@circle-seal.com
ind_sales@circle-seal.com

15-794 Series

Dimensions, Shipping Weights, and C_v Flow Factors

Catalog Num. Prefix	Pipe Size	X	Y	Z	Shipping Weight (lbs.)	C _v
15-794	1/2"	5 1/4"	3 7/8"	2 3/8"	4	3

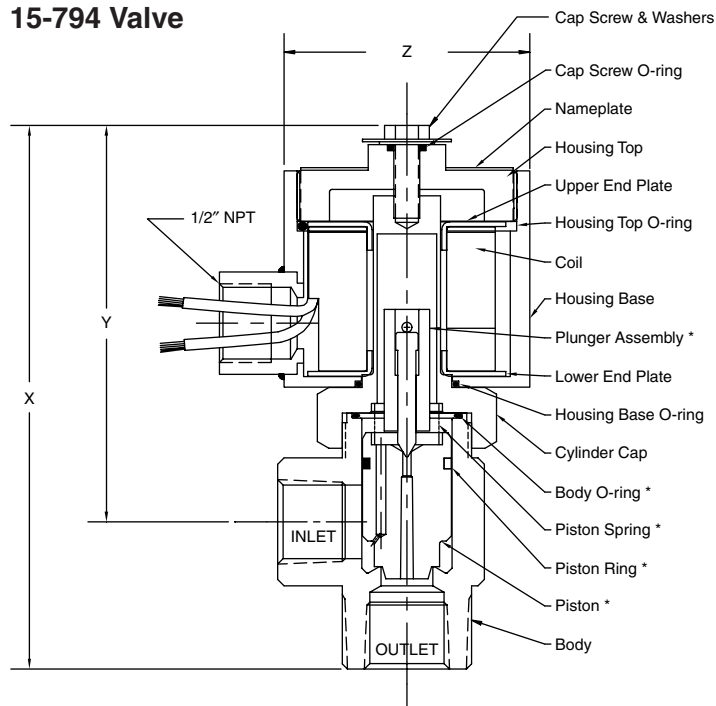

* Repair kit parts

How to Order

15-794 - X X X X

VOLTAGE AC/60 Hz

0	DC Voltage	5	230-60 VAC
1	24-60 VAC	6	460-60 VAC
2	100-60 VAC	7	110-50 VAC
3	115-60 VAC	8	220-50 VAC
4	200-60 VAC	9	380-50 VAC

CONNECTION TYPE

P	NPT
J	British Pipe Thread

COIL INSULATION RATING

B	Class B 155° C
H	Class H 188° C

VOLTAGE DC

0	AC Voltage
1	12 VDC
2	24 & 32 VDC
3	48 VDC
4	100 VDC
5	125 VDC
6	250 VDC

Teflon® is a registered trademark of Dupont.

For ordering wizard go to
www.circle-seal.com/atkomatic/product_selection_wizard.htm
 or request a disk from 909-270-6315.