

# Pneumatic Valve Actuator

*Pressures to 150,000 psi (10342 bar)*

The need to control process and vent valves from a remote location makes air operated valves a vital component to many processing operations.

All Autoclave Engineer's valves are available with diaphragm or piston type actuators. Five sizes of air actuators (light, heavy light, medium, heavy duty or extra heavy) are offered to meet the service requirements of Autoclave Engineer's Low, Medium and High Pressure valves. Both air-to-open (normally closed) and air-to-close (normally open) designs are included in the product line.

For most Autoclave Engineers valve series there is a choice of two or more actuator designs. This provides the most efficient and economical pneumatic valve operation for any combination of process requirements and available air pressure.

Actuators are available for outdoor service. These operators provide corrosion resistant components and prevent the ingress of outside elements.

Solenoid valve packages are available for on/off control of the supply air to the valve actuator. Packages contain the solenoid valve and fittings required to connect the air operator.



**Autoclave  
Engineers** 

Fluid Components  
Division of Snap-tite, Inc.  
[www.autoclaveengineers.com](http://www.autoclaveengineers.com)

**Actuator - Pneumatic**

# Pneumatic Valve Actuators - General information

**Pressures to 150,000 psi (10342 bar)**

## Pneumatic Actuator

Pressures to 150,000 psi (10342 bar)

Five sizes of air operators (light, heavy light, medium, heavy duty or extra heavy) are offered for remote on-off operation or automatic operation of Autoclave Engineer's low, medium or high pressure valves. The actuators are available in air-to-open (normally closed) and air-to-close (normally open) designs.

### Remote on-off

Autoclave Engineer's air-operated valves (**ATO**- Air-To-Open or **ATC**-Air-To-Close) can be controlled by a 3-way manual low pressure valve or by a low pressure solenoid valve. These are actuated by either a manual switch or an automatic control instrument. Autoclave Engineer's air-operated, high pressure valves permit process control from a remotely located panel without the necessity of piping high pressure lines to the control panel. Safety is greatly increased and process "hold-up" is reduced.

Prudent selection of ATO or ATC valves, together with the air controlling devices, permits the design of systems to "fail safe" in either the closed or open condition in the event of loss of operating air, or electrical failure, or malfunction.

Where explosion proof conditions are a requirement, pneumatic actuated valves can be considered. Remote mounting of the solenoid valve removes the potential from the hazardous area.


### Ordering Procedure

To order a valve with an air operator, select the duty rating and type of the air operator from the chart below. Add the air operator identifying suffix to the catalog number of the Autoclave Engineer's valve. To order a 2-way straight, 30VM vee stem, 9/16" valve with a medium duty air-to-close air operator, specify: ex: **30VM9071-C1S** for a yoke style piston air actuated valve or **30VM9071-CM** for an integral style diaphragm air operated valve.

To order the same valve with an extended high temperature stuffing box, add HT to the ordering number: ex: **30VM9071-C1SHT** or **30VM9071-CMHT**.

To order a dual air operator manifold valve, specify both operators. The same valve with a medium duty ATC on one stem and a medium duty ATO on the other, specify: ex: **30VM9075-C1S01S**.

To order a valve with operators for outdoor service add an "OD" suffix to the catalog number.

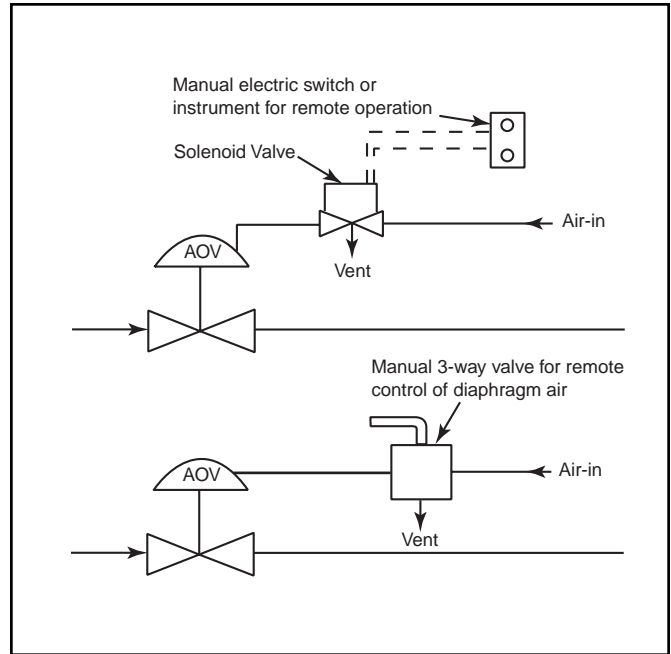

Duty Rating	Operator	Type	Ordering Suffix
Light	Diaphragm	Air-to-open	OL
		Air-to-close	CL
	Piston	Air-to-open	OLP
		Air-to-close	CLP
Heavy-Light	Piston	Air-to-open	OHLP
Medium	Diaphragm	Air-to-open	OM
		Air-to-close	CM
	Piston	Air-to-open	O1S
		Air-to-close	C1S
Heavy	Diaphragm	Air-to-open	OH
		Air-to-close	CH
	Piston	Air-to-open	O2S
		Air-to-close	C2S
Extra Heavy	Piston	Air-to-open	H02S
		Air-to-close	HC2S

# Pneumatic Valve Actuators - Actuator Quick Selector Guide

This table allows the designer to quickly select an appropriate air actuator based on valve style and size, maximum system operating pressure and maximum available air pressure. For example, if the system operating pressure is 25,000 psi (1724 bar) and the available

air pressure is 60 psi (4.14 bar) and an air-to-open (spring fail closed) valve is required, a 30VM or 60VM valve with a heavy duty air operator can be used. More specific sizing data is available in the sizing charts on the following pages.

Valve Series	Tube Outside Diameter in (mm)	Air-to-Close								Air-to-Open							
		Light		Medium		Heavy		Extra Heavy		Light		Medium		Heavy		Extra Heavy	
		System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)
10V	1/8 (3.18)	15,000 (1034.20)	100 (6.89)	15,000 (1034.20)	30 (2.07)					8,200 (565.36)	60 (4.14)	15,000 (1034.20)	45 (3.10)				
	1/4 (6.35)	10,000 (689.46)	100 (6.89)	15,000 (1034.20)	40 (2.75)					5,600 (386.10)	60 (4.14)	15,000 (1034.20)	65 (4.48)				
	3/8 (9.52)	10,000 (689.46)	100 (6.89)	15,000 (1034.20)	40 (2.75)					5,600 (386.10)	60 (4.14)	15,000 (1034.20)	65 (4.48)				
	1/2 (12.70)			10,000 (689.46)	65 (4.48)							10,000 (689.46)	95 (6.55)				
SW	1/4 (6.35)			15,000 (1034.20)	65 (4.48)							15,000 (1034.20)	100 (6.89)				
	3/8 (9.52)			15,000 (1034.20)	90 (6.21)	15,000 (1034.20)	50 (3.45)					10,000 (689.46)	95 (6.55)	15,000 (1034.20)	75 (5.17)		
	1/2 (12.70)			8,500 (586.05)	100 (6.89)	10,000 (689.46)	60 (4.14)					6,000 (413.68)	95 (6.55)	10,000 (689.46)	75 (5.17)		
10SM	9/16 (14.27)			8,600 (592.94)	100 (6.89)	10,000 (689.46)	55 (3.79)	10,000 (689.46)	20 (1.38)			7,900 (544.68)	95 (6.55)	10,000 (689.46)	75 (5.17)	10,000 (689.46)	40 (2.76)
	3/4 (19.05)			4,800 (330.94)	100 (6.89)	10,000 (689.46)	100 (6.89)	10,000 (689.46)	35 (2.41)					7,000 (482.63)	75 (5.17)	10,000 (689.46)	60 (4.14)
	1 (25.40)			2,800 (193.05)	100 (6.89)	6,300 (434.36)	100 (6.89)	10,000 (689.46)	35 (2.41)					4,300 (296.47)	75 (5.17)	10,000 (689.46)	85 (5.86)
20SM	1/4 (6.35)			20,000 (1378.93)	95 (6.55)	20,000 (1378.93)	50 (3.45)					20,000 (1378.93)	95 (6.55)	20,000 (1378.93)	50 (3.45)		
	3/8 (9.52)			19,000 (1309.98)	100 (6.89)	20,000 (1378.93)	55 (3.79)					18,250 (1258.27)	95 (6.55)	18,250 (1258.27)	50 (3.45)		
	9/16 (14.27)			10,700 (737.73)	100 (6.89)	20,000 (1378.93)	85 (5.86)	20,000 (1378.93)	30 (2.07)			9,800 (675.68)	95 (6.55)	15,700 (1082.46)	75 (5.17)	20,000 (1378.93)	55 (3.79)
	3/4 (19.05)			6,100 (420.57)	100 (6.89)	13,600 (937.67)	100 (6.89)	20,000 (1378.93)	50 (3.45)					9,200 (634.31)	75 (5.17)	20,000 (1378.93)	80 (5.52)
	1 (25.40)			3,900 (268.89)	100 (6.89)	8,800 (606.73)	100 (6.89)	20,000 (1378.93)	75 (5.17)					6,100 (420.57)	75 (5.17)	20,000 (1378.93)	100 (6.89)
30SC	1 (25.40)							30,000 (2068.39)	80 (5.52)							30,000 (2068.39)	100 (6.89)

Maximum pressure rating is based on the lowest rating of any component.  
 Actual working pressure may be determined by tubing pressure rating, if lower.  
 All dimensions for reference only and subject to change.  
 For prompt service, Autoclave stocks select products. Consult your local representative.

# Pneumatic Valve Actuators - Actuator Quick Selector Guide

Valve Series	Tube Outside Diameter in (mm)	Air-to-Close								Air-to-Open							
		Light		Medium		Heavy		Extra Heavy		Light		Medium		Heavy		Extra Heavy	
		System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)	System Pressure psi (bar)	Air Pressure psi (bar)
30VM	1/4 (6.35)			30,000 (2068.39)	50 (3.45)	30,000 (2068.39)	30 (2.07)					30,000 (2068.39)	75 (5.17)	30,000 (2068.39)	40 (2.76)		
	3/8 (9.52)			30,000 (2068.39)	75 (5.17)	30,000 (2068.39)	40 (2.76)					30,000 (2068.39)	95 (6.55)	30,000 (2068.39)	50 (3.45)		
	9/16 (14.27)			30,000 (2068.39)	75 (5.17)	30,000 (2068.39)	40 (2.76)					30,000 (2068.39)	95 (6.55)	30,000 (2068.39)	50 (3.45)		
40VM	9/16 (14.27)					40,000 (2757.86)	45 (3.10)							40,000 (2757.86)	55 (3.79)		
60VM	1/4 (6.35)			60,000 (4136.79)	75 (5.17)	60,000 (4136.79)	40 (2.76)					60,000 (4136.79)	95 (6.55)	60,000 (4136.79)	50 (3.45)		
	3/8 (9.52)			60,000 (4136.79)	75 (5.17)	60,000 (4136.79)	40 (2.76)					60,000 (4136.79)	95 (6.55)	60,000 (4136.79)	50 (3.45)		
	9/16 (14.27)			60,000 (4136.79)	90 (6.21)	60,000 (4136.79)	45 (3.10)					60,000 (4136.79)	95 (6.55)	60,000 (4136.79)	50 (3.45)		
100VM 150V	5/16 (7.92)			100,000 (6894.55)	100 (6.89)	100,000 (6894.65)	50 (3.45)							100,000 (6894.65)	70 (4.83)		
	5/16 (7.92)					150,000 (10341.97)	80 (5.52)							150,000 (10341.97)	75 (5.17)		

MVE/MV Mini Valves Series			Air-to-Open			
MVE MV	1/16 (1.57) 1/8 (3.18)		Heavy-Light			
			15,000 (1034.20)	100 (6.89)		
			15,000 (1034.20)	100 (6.89)		

Maximum pressure rating is based on the lowest rating of any component.  
 Actual working pressure may be determined by tubing pressure rating, if lower.  
 All dimensions for reference only and subject to change.  
 For prompt service, Autoclave stocks select products. Consult your local representative.


# Pneumatic Valve Actuators - Piston Style Pneumatic

**Pressures to 150,000 psi (10342 bar)**


Piston type air-operated valves offer a unique, reliable design providing for a long and dependable life. These valves are more compact than diaphragm valves and are appropriate for applications such as high-flow gas and liquid delivery systems to reactors and mixer/vaporizers.

Autoclave Engineer's piston type actuators feature:

- Small, compact, piston actuator
- Air-to-open or -close with spring return
- Yoke design for separation of process and air pressure †
- Ease of stem replacement
- Stem position indicator is standard †
- Positive shut-off metal-to-metal seating
- High actuator cycle life

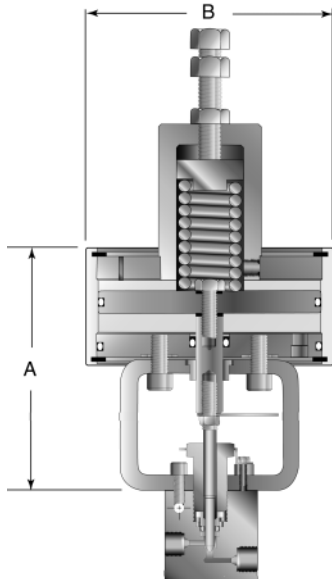

Air-to-Open (ATO)

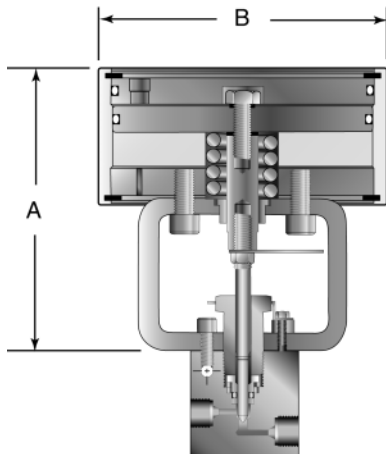

Air-to-Close (ATC)



## Air Operator Materials

Cylinder, piston, cover plates, spring housing

- Anodized aluminum (for corrosion and wear resistance).

Yoke

- Painted Steel

## Technical Data

### Air Operator

- Maximum allowable working pressure: 100 psi (6.89 bar)
- Allowable piston temperature range: -20°F to 200°F (-29°C to 93°C)
- Area of piston:
  - Light duty - 4.9 sq. in (31.6 sq. cm)
  - Heavy-Light duty - 5.4 sq. in (34.8 sq. cm)
  - Medium duty - 19.6 sq. in (126.5 sq. cm)
  - Heavy duty - 39.2 sq. in (252.9 sq. cm)
  - Extra Heavy duty - 112 sq. in (722.6 sq. cm)
- Approximate air usage/cycle @ 100 psi (6.89 bar):
  - Light duty - .003 SCF (.00008 SCM)
  - Heavy-Light duty - .007 SCF (.0002 SCM)
  - Medium duty - .04 SCF (.0011 SCM)
  - Heavy duty - .08 SCF (.0022 SCM)
  - Extra Heavy duty - .67 SCF (.019 SCM)
- Tested to 100,000 cycles at 100 psi (6.89 bar) with no leakage or signs of wear or fatigue.

Duty Rating	Type	Ordering Suffix	Dimensions: inches (mm)	
			A	B
Light	Air-to-open	O LP	5.50 (139.70)	2.81 (71.37)
	Air-to-close	C LP	3.94 (100.08)	2.81 (71.37)
† Heavy-Light	Air-to-open	O HLP	3.84 (97.67)	3.06 (77.72)
Medium	Air-to-open	O 1S	8.25 (209.55)	5.69 (144.52)
	Air-to-close	C 1S	5.50 (139.70)	5.69 (144.52)
Heavy	Air-to-open	O 2S	11.88 (301.75)	5.69 (144.52)
	Air-to-close	C 2S	8.50 (215.90)	5.69 (144.52)
Extra Heavy	Air-to-open	H O2S	18.50 (469.90)	9.44 (239.78)
	Air-to-close	H C2S	11.94 (303.27)	9.44 (239.78)

† The standard Heavy-Light operator does not utilize the yoke design. A yoke design is available upon request.

All general terms and conditions of sale, including limitations of our liability, apply to all products and services sold.



# Pneumatic Valve Actuators - Air Operator Sizing Data

## Air-to-Close

### Series 10V and SW Valves

Valve Series	Operator Duty	System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Stem Travel in (mm)	Flow Coefficient**	
		1-4 (6.89-27.57)	6 (41.37)	8 (55.16)	10 (68.95)	12 (82.74)	14 (96.53)	15 (103.42)							
10V2	Light Duty	30 (2.04)	40 (2.72)	55 (3.74)	65 (4.42)	85 (5.86)	95 (6.46)	100 (6.80)					15,000 (1034.20)	0.16 (4.06)	0.12
	Medium Duty	25 (1.70)	25 (1.70)	25 (1.70)	25 (1.70)	25 (1.70)	25 (1.70)	30 (2.04)							
10V4	Light Duty	40 (2.72)	60 (4.08)	75 (5.10)	95 (6.46)								10,000 (689.46)	0.19 (4.83)	0.20
	Medium Duty	30 (2.04)	30 (2.04)	30 (2.04)	30 (2.04)	35 (2.38)	35 (2.38)	40 (2.72)					15,000 (1034.20)		
10V6	Light Duty	40 (2.72)	60 (4.08)	75 (5.10)	100 (6.80)								10,000 (689.46)	0.19 (4.83)	0.20
	Medium Duty	30 (2.04)	30 (2.04)	30 (2.04)	35 (2.38)	35 (2.38)	35 (2.38)	40 (2.72)					15,000 (1034.20)		
10V8	Medium Duty	50 (3.40)	50 (3.40)	55 (3.79)	65 (4.48)								5,500 (379.21)	0.31 (7.90)	0.086
SW4	Medium Duty	40 (2.72)	40 (2.72)	40 (2.72)	50 (3.40)	55 (4.08)	60 (4.14)	65 (4.48)					15,000 (1034.20)	0.25 (6.40)	0.065
SW6	Medium Duty	50 (3.40)	50 (3.40)	55 (3.74)	70 (4.76)	75 (5.10)	85 (5.86)	90 (6.21)					10,000 (689.46)	0.25 (6.40)	0.095
	Heavy Duty	20 (1.38)	25 (1.72)	30 (2.07)	35 (2.41)	40 (2.76)	45 (3.10)	50 (3.45)					15,000 (1034.20)	0.25 (6.40)	
SW8	Medium Duty	65 (4.42)	70 (4.76)	100 (6.80)									8,500 (586.46)	0.38 (9.70)	1.90
	Heavy Duty	35 (2.38)	35 (2.38)	50 (3.40)	60 (4.14)								10,000 (698.46)		

### Series 10SM

Valve Series	Operator Duty	System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Stem Travel in (mm)	Flow Coefficient**	
		1-3 (6.89-20.68)	4 (27.58)	6 (41.37)	8 (55.16)	10 (68.95)	12 (82.74)	14 (96.53)	16 (110.31)	18 (124.10)	20 (137.89)				
10SM9	Medium Duty	65 (4.42)	65 (4.42)	75 (5.10)	100 (6.80)								8,600 (592.94)	0.38 (9.65)	1.75
	Heavy Duty	35 (2.38)	35 (2.38)	40 (2.72)	50 (3.40)	55 (3.74)						10,000 (689.46)			
	Extra Heavy Duty	15 (1.02)	15 (1.02)	15 (1.02)	20 (1.38)	20 (1.38)						10,000 (689.46)			
10SM12	Medium Duty	90 (6.12)	100 (6.80)										4,800 (330.94)	0.44 (11.18)	2.80
	Heavy Duty	45 (3.06)	45 (3.06)	60 (4.08)	80 (5.44)	100 (6.80)						10,000 (689.46)			
	Extra Heavy Duty	20 (1.36)	20 (1.36)	25 (1.70)	30 (2.04)	35 (2.38)						10,000 (689.46)			
10SM16	Medium Duty	100 (6.80)											2,800 (193.05)	0.56 (14.22)	5.20
	Heavy Duty	60 (4.08)	70 (4.76)	100 (6.80)								6,300 (434.36)			
	Extra Heavy Duty	25 (1.70)	25 (1.70)	35 (2.38)	45 (3.06)	55 (3.06)						10,000 (689.46)			

Note: System operating pressure are shown for piston style operators.  
The maximum system operating pressure for some diaphragm operators is slightly reduced (approximately 10%).

\*Maximum pressure rating is based on the lowest rating of any component.  
Actual working pressure may be determined by tubing pressure rating, if lower.

All dimensions for reference only and subject to change.

For prompt service, Autoclave stocks select products. Consult your local representative.

\*\*  $C_V$  data is for 2-way straight valves. For angle pattern, add approximately 50% to the  $C_V$  value.

All general terms and conditions of sale, including limitations of our liability, apply to all products and services sold.

## Air-to-Close - Series 20SM Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Stem Travel in (mm)	Flow Coefficient**	
			1-3 (6.89-20.68)	4 (27.58)	6 (41.37)	8 (55.16)	10 (68.95)	12 (82.74)	14 (96.53)	16 (110.31)	18 (124.10)	20 (137.89)				
20SM4	Medium Duty	Air Pressure psi (bar)	40 (2.72)	40 (2.72)	40 (2.724)	40 (2.72)	50 (3.40)	60 (4.08)	70 (4.76)	80 (5.44)	85 (5.78)	95 (6.46)	20,000 (1378.93)	0.25 (6.35)	0.31	
	Heavy Duty		20 (1.36)	20 (1.36)	20 (1.36)	20 (1.36)	25 (1.70)	30 (2.04)	35 (2.38)	40 (2.72)	45 (3.06)	50 (3.40)				
20SM6	Medium Duty		45 (3.06)	45 (3.06)	45 (3.06)	45 (3.06)	55 (3.74)	65 (4.42)	75 (5.10)	85 (5.78)	95 (6.46)	100 (6.80)	19,000 (1309.98)	0.25 (6.35)	0.75	
	Heavy Duty		25 (1.70)	25 (1.70)	25 (1.70)	25 (1.70)	30 (2.04)	35 (2.38)	40 (2.72)	45 (3.06)	50 (3.40)	55 (3.74)	18,000 (1360.54)			
20SM9	Medium Duty		60 (4.08)	60 (4.08)	65 (4.42)	80 (5.44)	100 (6.80)							10,700 (737.73)	0.38 (9.65)	1.30
	Heavy Duty		30 (2.04)	30 (2.04)	30 (2.04)	40 (2.72)	50 (3.40)	55 (3.74)	60 (4.08)	70 (4.76)	80 (5.44)	85 (5.78)	20,000 (1378.93)			
	Extra Heavy Duty		15 (1.02)	15 (1.02)	15 (1.02)	15 (1.02)	20 (1.36)	20 (1.36)	25 (1.70)	25 (1.70)	30 (2.04)	30 (2.04)	20,000 (1378.93)			
20SM12	Medium Duty		80 (5.44)	80 (5.44)	100 (6.80)									6,100 (420.57)	0.44 (11.18)	2.50
	Heavy Duty		40 (2.72)	40 (2.72)	50 (3.40)	60 (4.08)	75 (5.10)	90 (6.12)	100 (6.80)				13,600 (937.67)			
	Extra Heavy Duty		15 (1.02)	15 (1.02)	20 (1.36)	25 (1.70)	30 (2.04)	35 (2.38)	40 (2.72)	45 (3.06)	50 (3.40)	50 (3.40)	20,000 (1378.93)			
20SM16	Medium Duty	100 (6.80)	100 (6.80)										3,900 (268.89)	0.56 (14.22)	3.40	
	Heavy Duty	50 (3.40)	50 (3.40)	70 (4.76)	100 (6.80)							8,800 (606.73)				
	Extra Heavy Duty	20 (1.36)	20 (1.36)	25 (1.70)	35 (2.38)	40 (2.72)	50 (3.40)	55 (3.74)	60 (4.08)	70 (4.76)	75 (5.10)	20,000 (1378.93)				

## Series 30SC Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Stem Travel in (mm)	Flow Coefficient**
			1-10 (6.89-68.94)	15 (103.42)	16 (110.31)	18 (124.10)	20 (137.89)	22 (151.68)	24 (165.47)	26 (179.26)	28 (193.05)	30 (206.84)			
30SC16	Extra Heavy Duty	Air Pressure psi (bar)	30 (2.04)	40 (2.72)	45 (3.06)	50 (3.40)	55 (3.74)	60 (4.08)	65 (4.42)	70 (4.76)	75 (5.10)	80 (5.44)	30,000 (2068.39)	0.50 (12.70)	2.61

## Series 30VM Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Stem Travel in (mm)	Flow Coefficient**	
			1-10 (6.89-68.94)	12 (82.74)	14 (96.53)	16 (110.31)	18 (124.10)	20 (137.89)	22 (151.68)	24 (165.47)	26 (179.26)	28 (193.05)				30 (206.84)
30VM4	Medium Duty	Air Pressure psi (bar)	25 (1.70)	25 (1.70)	25 (1.70)	30 (2.04)	35 (2.38)	35 (2.38)	40 (2.72)	45 (3.06)	50 (3.40)	50 (3.40)	55 (3.74)	30,000 (2068.39)	0.19 (4.83)	0.12
	Heavy Duty		15 (1.02)	15 (1.02)	15 (1.02)	15 (1.02)	20 (1.36)	20 (1.36)	20 (1.36)	25 (1.70)	25 (1.70)	25 (1.70)	30 (2.04)			
30VM6 & 30VM9	Medium Duty		30 (2.04)	30 (3.06)	35 (2.38)	40 (2.72)	45 (3.06)	50 (3.40)	55 (3.74)	60 (4.08)	65 (4.42)	70 (4.76)	75 (5.10)	30,000 (2068.39)	0.19 (4.83)	0.23 (30VM6)
	Heavy Duty		15 (1.02)	15 (1.02)	20 (1.36)	20 (1.36)	25 (1.70)	25 (1.70)	30 (2.04)	30 (2.04)	35 (2.38)	35 (2.38)	40 (2.72)			0.33 (30VM9)

All ratings for reference only and subject to change.

Note: System operating pressure are shown for piston style operators.

The maximum system operating pressure for some diaphragm operators is slightly reduced (approximately 10%).

\*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower.

All dimensions for reference only and subject to change.

For prompt service, Autoclave stocks select products. Consult your local representative.

\*\* C<sub>v</sub> data is for 2-way straight valves.

For angle pattern, add approximately 50% to the C<sub>v</sub> valve.

All general terms and conditions of sale, including limitations of our liability, apply to all products and services sold.

## Air-to-Close - Series 40VM Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)								Maximum Pressure psi (bar)*	Stem Travel in (mm)	Flow Coefficient**
			1-10 (6.89-68.94)	15 (103.42)	20 (137.89)	25 (172.37)	30 (206.84)	35 (241.31)	40 (275.79)				
40VM9	Medium Duty	Air Pressure psi (bar)	40 (2.72)	50 (3.40)	60 (4.08)	70 (4.76)	80 (5.44)	90 (6.12)	90 (6.12)		40,000 (2757.86)	0.25 (6.35)	0.28
	Heavy Duty		20 (1.36)	25 (1.70)	30 (2.04)	35 (2.38)	40 (2.72)	45 (3.06)	45 (3.06)				

## Series 60VM Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)									Maximum Pressure psi (bar)*	Stem Travel in (mm)	Flow Coefficient**
			1-20 (6.89-137.89)	25 (172.37)	30 (206.84)	35 (241.31)	40 (275.79)	45 (310.26)	50 (344.73)	55 (379.21)	60 (413.68)			
60VM4 & 60VM6	Medium Duty	Air Pressure psi (bar)	30 (2.04)	30 (2.04)	35 (2.38)	45 (3.06)	50 (3.40)	55 (3.74)	60 (4.08)	70 (4.76)	75 (5.10)	60,000 (4136.79)	0.25 (6.35)	0.08 (60VM4)
	Heavy Duty		15 (1.02)	15 (1.02)	20 (1.36)	25 (1.70)	25 (1.70)	30 (2.04)	30 (2.04)	35 (2.38)	40 (2.72)			0.09 (60VM6)
60VM9	Medium Duty		35 (2.38)	40 (2.72)	50 (3.40)	55 (3.74)	65 (4.42)	70 (4.76)	75 (5.10)	85 (5.78)	90 (6.12)	60,000 (4136.79)	0.25 (6.35)	0.14
	Heavy Duty		20 (1.36)	20 (1.36)	25 (1.70)	30 (2.04)	35 (2.38)	35 (2.38)	40 (2.72)	45 (3.06)	45 (3.06)			

## Series 100VM & 150V Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)								Maximum Pressure psi (bar)*	Stem Travel in (mm)	Flow Coefficient**
			1-40 (6.89-275.79)	50 (344.73)	60 (413.68)	70 (482.63)	80 (551.57)	90 (620.52)	100 (689.46)	150 (1034.20)			
100VM5	Medium Duty	Air Pressure psi (bar)	50 (3.45)	55 (3.79)	65 (4.48)	75 (5.17)	85 (5.86)	95 (6.55)	100 (6.89)		100,000 (6894.65)	0.12 (3.05)	0.09
	Heavy Duty		30 (2.07)	30 (2.07)	35 (2.41)	40 (2.76)	40 (2.76)	45 (3.10)	50 (3.45)				
150V5	Heavy Duty		35 (2.38)	40 (2.72)	45 (3.06)	45 (3.06)	50 (3.40)	55 (3.74)	60 (4.08)	100 (6.80)		150,000 (10341.97)	0.12 (3.05)

Note: System operating pressure are shown for piston style operators. The maximum system operating pressure for some diaphragm operators is slightly reduced (approximately 10%).

\*\*  $C_V$  data is for 2-way straight valves. For angle pattern, add approximately 50% to the  $C_V$  valve.

**CAUTION:** While testing has shown O-rings to provide satisfactory service life, both cyclic and shelf life may vary widely with differing service conditions, properties of reactants, pressure and temperature cycling and age of the O-ring. FREQUENT INSPECTIONS SHOULD BE MADE to detect any deterioration, and O-rings replaced as required.

\*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower.

All dimensions for reference only and subject to change.

For prompt service, Autoclave stocks select products. Consult your local representative.

# Pneumatic Valve Actuators - Air Operator Sizing Data

## Air-to-Open

### Series 10V Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)								Maximum Pressure psi (bar)*	Flow Coefficient Cv**
			1-6 (6.89-41.37)	8 (110.31)	10 (124.10)	12 (82.74)	14 (96.53)	15 (103.42)				
10V2	Light Duty	Air Pressure: psi (bar)	60 (4.08)	60 (4.08)							8,200 (565.36)	0.12 to 0.09***
		Spring Pre-Compression: in. (mm)	0.31 (7.87)	0.38 (9.65)								
		Stem Travel in (mm)	0.12 (3.05)	0.06 (1.52)								
	Medium Duty	Air Pressure: psi (bar)	40 (2.72)	40 (2.72)	40 (2.72)	40 (2.72)	40 (2.72)	45 (3.10)			15,000 (1034.20)	0.12
		Spring Pre-Compression: in. (mm)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.16 (4.06)				
		Stem Travel in (mm)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)				
10V4 10V6	Light Duty	Air Pressure: psi (bar)	60 (4.08)								5,600 (386.46)	0.02 to 0.17***
		Spring Pre-Compression: in. (mm)	0.38 (9.65)									
		Stem Travel in (mm)	0.06 (1.52)									
10V4	Medium Duty	Air Pressure: psi (bar)	45 (3.06)	45 (3.06)	50 (3.45)	55 (3.79)	60 (4.14)	65 (4.48)			15,000 (1034.20)	0.20
		Spring Pre-Compression: in. (mm)	0.12 (3.05)	0.12 (3.05)	0.14 (3.65)	0.18 (4.75)	0.20 (5.08)	0.22 (5.59)				
		Stem Travel in (mm)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)				
10V6	Medium Duty	Air Pressure: psi (bar)	45 (3.06)	45 (3.06)	50 (3.45)	55 (3.74)	60 (4.14)	65 (4.48)			15,000 (1034.20)	0.20
		Spring Pre-Compression: in. (mm)	0.12 (3.05)	0.12 (3.05)	0.14 (3.56)	0.18 (4.57)	0.20 (5.08)	0.22 (5.57)				
		Stem Travel in (mm)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)				
10V8	Medium Duty	Air Pressure: psi (bar)	75 (5.10)	85 (5.86)	95 (6.55)						10,000 (689.46)	0.86
		Spring Pre-Compression: in. (mm)	0.25 (6.35)	0.30 (7.62)	0.38 (9.65)							
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)							
	Heavy Duty	Air Pressure: psi (bar)	50 (3.45)	55 (3.79)	60 (4.14)						10,000 (689.46)	0.86
		Spring Pre-Compression: in. (mm)	0.14 (3.56)	0.20 (5.08)	0.24 (6.10)							
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)							

Note: System operating pressure are shown for piston style operators. The maximum system operating pressure for some diaphragm operators is slightly reduced (approximately 10%).

\*\* Cv data is for 2-way straight valves. For angle pattern, add approximately 50% to the Cv valve.

\*\*\* Cv varies because of spring compression limitations. The flow coefficient range is given for the maximum stem travel (lowest system pressure) to minimum travel (highest system pressure).

**CAUTION:** While testing has shown O-rings to provide satisfactory service life, both cyclic and shelf life may vary widely with differing service conditions, properties of reactants, pressure and temperature cycling and age of the O-ring. FREQUENT INSPECTIONS SHOULD BE MADE to detect any deterioration, and O-rings replaced as required.

\*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower.

All dimensions for reference only and subject to change.

For prompt service, Autoclave stocks select products. Consult your local representative.

# Air-to-Open

## Series SW Valves

Valve Series	Operator Duty	System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Flow Coefficient Cv**	
		1-6 (6.89-41.37)	8 (55.16)	10 (68.95)	12 (82.74)	14 (96.53)	15 (103.41)							
SW4	Medium Duty	Air Pressure: psi (bar)	65 (4.42)	65 (4.42)	75 (5.10)	85 (5.78)	95 (6.55)	95 (6.55)					15,000 (1034.20)	0.065
		Spring Pre-Compression: in. (mm)	0.19 (4.83)	0.19 (4.83)	0.25 (6.35)	0.31 (7.87)	0.36 (9.14)	0.38 (9.14)						
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)						
SW6	Medium Duty	Air Pressure: psi (bar)	75 (5.10)	75 (5.10)	95 (6.46)	95 (6.46)	95 (6.46)	100 (6.80)					15,000 (1034.20)	0.12
		Spring Pre-Compression: in. (mm)	0.25 (6.35)	0.25 (6.35)	0.28 (7.11)	0.44 (11.17)	0.52 (13.21)	0.56 (14.22)						
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.19 (4.83)	0.10 (2.54)	0.06 (1.53)						
SW6	Heavy Duty	Air Pressure: psi (bar)	50 (3.45)	55 (3.79)	60 (4.14)	65 (4.48)	70 (4.83)	75 (5.17)					15,000 (1034.20)	0.12
		Spring Pre-Compression: in. (mm)	0.14 (3.56)	0.19 (4.83)	0.24 (6.10)	0.28 (7.11)	0.34 (8.64)	0.36 (9.14)						
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)						
SW8	Medium Duty	Air Pressure: psi (bar)	95 (6.48)	95 (6.48)								8,000 (551.57)	1.75	
		Spring Pre-Compression: in. (mm)	0.38 (9.65)	0.56 (14.22)										
	Medium Duty	Air Pressure: psi (bar)	50 (3.40)											
SW8	Heavy Duty	Air Pressure: psi (bar)	65 (4.48)	75 (5.17)	75 (5.17)							10,000 (689.46)	1.75	
		Spring Pre-Compression: in. (mm)	0.28 (7.11)	0.38 (9.65)	0.44 (11.18)									
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.19 (4.83)									

## Series MVE/MV Valves

Valve Series	Operator Duty	System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Flow Coefficient Cv**	
		1-6 (6.89-41.37)	8 (55.15)	10 (68.95)	12 (82.74)	14 (96.53)	15 (103.41)							
MVE1 MV1	Heavy-Light Duty	Air Pressure: psi (bar)	60 (4.08)	65 (4.42)	75 (5.10)	85 (5.78)	90 (6.12)	100 (6.80)					15,000 (1034.20)	MVE1/MV1 (0.05)
		Spring Pre-Compression: in. (mm)	0.073 (1.85)	0.094 (2.39)	0.125 (3.18)	0.147 (3.73)	0.172 (4.37)	0.188 (4.78)						
		Stem Travel in (mm)	0.094 (2.39)	0.094 (2.39)	0.094 (2.39)	0.094 (2.39)	0.094 (2.39)	0.094 (2.39)						
MVE2 MV2													MVE2/MV2 (0.11)	

Note: System operating pressure are shown for piston style operators. The maximum system operating pressure for some diaphragm operators is slightly reduced (approximately 10%).

\*\*Cv data is for 2-way straight valves. For angle pattern, add approximately 50% to the Cv valve.

**CAUTION:** While testing has shown O-rings to provide satisfactory service life, both cyclic and shelf life may vary widely with differing service conditions, properties of reactants, pressure and temperature cycling and age of the O-ring, FREQUENT INSPECTIONS SHOULD BE MADE to detect any deterioration, and O-rings replaced as required.

\*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower.

All dimensions for reference only and subject to change.

For prompt service, Autoclave stocks select products. Consult your local representative.

## Air-to-Open - Series 10SM and 20SM Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Flow Coefficient Cv**	
			1-4 (6.89-27.58)	6 (41.37)	8 (55.15)	10 (68.95)	12 (82.74)	14 (96.53)	16 (110.31)	18 (124.10)	20 (137.89)				
10SM9	Medium Duty	Air Pressure: psi (bar)	95 (6.46)	95 (6.46)	95 (6.46)									7,900 (544.68)	1.74 to 0.72***
		Spring Pre-Compression: in. (mm)	0.38 (9.65)	0.44 (11.18)	0.56 (14.22)										
		Stem Travel in (mm)	0.25 (6.35)	0.19 (4.83)	0.06 (1.52)										
	Heavy Duty	Air Pressure: psi (bar)	55 (3.74)	65 (4.42)	70 (4.76)	75 (5.10)								10,000 (689.46)	1.74 to 0.72***
		Spring Pre-Compression: in. (mm)	0.22 (5.59)	0.28 (7.11)	0.34 (8.64)	0.44 (11.18)									
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.19 (4.83)									
	Extra Heavy Duty	Air Pressure: psi (bar)	25 (1.70)	30 (2.04)	35 (2.38)	40 (2.72)								10,000 (689.46)	1.75
		Spring Pre-Compression: in. (mm)	0.16 (4.06)	0.19 (4.83)	0.25 (6.35)	0.28 (7.11)									
		Stem Travel in (mm)	0.38 (9.65)	0.38 (9.65)	0.38 (9.65)	0.38 (9.65)									
10SM12	Heavy Duty	Air Pressure: psi (bar)	70 (4.76)	75 (5.10)									7,000 (482.63)	2.23 to 0.78***	
		Spring Pre-Compression: in. (mm)	0.24 (6.10)	0.56 (14.22)											
		Stem Travel in (mm)	0.25 (6.35)	0.06 (1.52)											
	Extra Heavy Duty	Air Pressure: psi (bar)	40 (2.72)	50 (3.40)	55 (3.74)	60 (4.08)							10,000 (689.46)	2.80	
		Spring Pre-Compression: in. (mm)	0.22 (5.59)	0.31 (7.87)	0.44 (11.18)	0.53 (13.46)									
		Stem Travel in (mm)	0.44 (11.18)	0.44 (11.18)	0.44 (11.18)	0.44 (11.18)									
10SM16	Heavy Duty	Air Pressure: psi (bar)	75 (5.10)										4,300 (296.47)	0.79	
		Spring Pre-Compression: in. (mm)	0.56 (14.22)												
		Stem Travel in (mm)	0.06 (1.52)												
	Extra Heavy Duty	Air Pressure: psi (bar)	55 (3.74)	65 (4.42)	75 (5.10)	85 (5.78)							10,000 (689.46)	5.20	
		Spring Pre-Compression: in. (mm)	0.34 (8.64)	0.53 (13.46)	0.69 (17.53)	0.88 (22.35)									
		Stem Travel in (mm)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)									
20SM4	Medium Duty	Air Pressure: psi (bar)	65 (4.42)	65 (4.42)	65 (4.42)	75 (5.10)	85 (5.78)	95 (6.46)	95 (6.46)	95 (6.46)	95 (6.46)		20,000 (1378.93)	0.31 to 0.22***	
		Spring Pre-Compression: in. (mm)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.25 (6.35)	0.31 (7.87)	0.38 (9.65)	0.44 (11.18)	0.50 (12.70)	0.56 (14.22)				
	Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.19 (4.83)	0.12 (3.05)	0.06 (1.52)					
	Heavy Duty	Air Pressure: psi (bar)	35 (2.38)	35 (2.38)	35 (2.38)	40 (2.72)	45 (3.06)	50 (3.40)	50 (3.40)	50 (3.40)	50 (3.40)				

Note: System operating pressure are shown for piston style operators. The maximum system operating pressure for some diaphragm operators is slightly reduced (approximately 10%).

\*\* Cv data is for 2-way straight valves. For angle pattern, add approximately 50% to the Cv valve.

\*\*\* Cv varies because of spring compression limitations. The flow coefficient range is given for the maximum stem travel (lowest system pressure) to minimum travel (highest system pressure).

**CAUTION:** While testing has shown O-rings to provide satisfactory service life, both cyclic and shelf life may vary widely with differing service conditions, properties of reactants, pressure and temperature cycling and age of the O-ring. FREQUENT INSPECTIONS SHOULD BE MADE to detect any deterioration, and O-rings replaced as required.

\* Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower.

All dimensions for reference only and subject to change.

For prompt service, Autoclave stocks select products. Consult your local representative.

## Air-to-Open - Series 10SM and 20SM Valves

Valve Series	Operator Duty	System Pressure KSI (Mpa)											Maximum Pressure psi (bar)*	Flow Coefficient Cv**
		1-4 (6.89-27.58)	6 (41.37)	8 (55.15)	10 (68.95)	12 (82.74)	14 (96.53)	16 (110.31)	18 (124.10)	20 (137.89)				
20SM6	Medium Duty	Air Pressure: psi (bar)	65 (4.42)	65 (4.42)	75 (5.10)	85 (5.78)	95 (6.46)	95 (6.46)	95 (6.46)	95 (6.46)			18,250 (1258.27)	0.75 to 0.57***
		Spring Pre-Compression: in. (mm)	0.19 (4.83)	0.19 (4.83)	0.25 (6.35)	0.31 (7.87)	0.38 (9.65)	0.44 (11.18)	0.50 (12.70)	0.56 (14.22)				
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.19 (4.83)	0.12 (3.05)	0.06 (1.52)				
	Heavy Duty	Air Pressure: psi (bar)	35 (2.38)	35 (2.38)	40 (2.72)	45 (3.06)	50 (3.40)	50 (3.40)	50 (3.40)	50 (3.40)				
20SM9	Medium Duty	Air Pressure: psi (bar)	85 (5.78)	90 (6.12)	95 (6.46)	95 (6.46)							9,800 (675.68)	1.29 to 0.53***
		Spring Pre-Compression: in. (mm)	0.31 (7.87)	0.34 (8.64)	0.47 (11.94)	0.56 (14.22)								
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.15 (3.81)	0.06 (1.52)								
	Heavy Duty	Air Pressure: psi (bar)	50 (3.40)	55 (3.74)	65 (4.42)	70 (4.76)	75 (5.10)	75 (5.10)	75 (5.10)				15,700 (1082.46)	1.29 to 0.53***
		Spring Pre-Compression: in. (mm)	0.19 (4.83)	0.22 (5.59)	0.28 (7.11)	0.34 (8.64)	0.44 (11.18)	0.50 (12.70)	0.56 (14.22)					
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.19 (4.83)	0.12 (3.05)	0.60 (15.24)					
	Extra Heavy Duty	Air Pressure: psi (bar)	30 (2.04)	35 (2.38)	35 (2.38)	40 (2.72)	40 (2.72)	45 (3.06)	50 (3.40)	50 (3.40)	55 (3.74)		20,000 (1378.93)	1.30
		Spring Pre-Compression: in. (mm)	0.13 (3.30)	0.16 (4.06)	0.19 (4.83)	0.25 (6.35)	0.28 (7.11)	0.34 (8.64)	0.38 (9.65)	0.44 (11.18)	0.47 (11.94)			
		Stem Travel in (mm)	0.38 (9.65)	0.38 (9.65)	0.38 (9.65)	0.38 (9.65)	0.38 (9.65)	0.38 (9.65)	0.38 (9.65)	0.38 (9.65)	0.38 (9.65)			
20SM12	Heavy Duty	Air Pressure: psi (bar)	65 (4.42)	75 (5.10)	75 (5.10)								9,200 (634.31)	0.80 to 0.78***
		Spring Pre-Compression: in. (mm)	0.28 (7.11)	0.38 (9.65)	0.56 (14.22)									
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.06 (1.52)									
	Extra Heavy Duty	Air Pressure: psi (bar)	40 (2.72)	45 (3.06)	50 (3.40)	55 (3.74)	60 (4.08)	65 (4.42)	70 (4.76)	75 (5.10)	80 (5.44)		20,000 (1378.93)	2.50
		Spring Pre-Compression: in. (mm)	0.19 (4.83)	0.25 (6.35)	0.31 (7.87)	0.41 (10.41)	0.50 (12.70)	0.56 (14.22)	0.66 (16.76)	0.72 (18.29)	0.81 (20.57)			
		Stem Travel in (mm)	0.44 (11.18)	0.44 (11.18)	0.44 (11.18)	0.44 (11.18)	0.44 (11.18)	0.44 (11.18)	0.44 (11.18)	0.44 (11.18)	0.44 (11.18)			
20SM16	Heavy Duty	Air Pressure: psi (bar)	75 (5.10)	75 (5.10)								6,100 (420.57)	2.73 to .15***	
		Spring Pre-Compression: in. (mm)	0.38 (9.65)	0.56 (14.22)										
		Stem Travel in (mm)	0.25 (6.35)	0.06 (1.52)										
	Extra Heavy Duty	Air Pressure: psi (bar)	50 (3.40)	55 (3.74)	65 (4.42)	70 (4.76)	80 (5.44)	85 (5.78)	90 (6.12)	100 (6.80)	100 (6.80)		20,000 (1378.93)	3.40
		Spring Pre-Compression: in. (mm)	0.25 (6.35)	0.38 (9.65)	0.50 (12.70)	0.63 (16.00)	0.75 (19.05)	0.84 (21.34)	0.97 (24.64)	1.09 (27.69)	1.22 (30.99)			
		Stem Travel in (mm)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)			

Note: System operating pressure are shown for piston style operators. The maximum system operating pressure for some diaphragm operators is slightly reduced (approximately 10%).

\*\*  $C_v$  data is for 2-way straight valves. For angle pattern, add approximately 50% to the  $C_v$  valve.

\*\*\*  $C_v$  varies because of spring compression limitations. The flow coefficient range is given for the maximum stem travel (lowest system pressure) to minimum travel (highest system pressure).

**CAUTION:** While testing has shown O-rings to provide satisfactory service life, both cyclic and shelf life may vary widely with differing service conditions, properties of reactants, pressure and temperature cycling and age of the O-ring, FREQUENT INSPECTIONS SHOULD BE MADE to detect any deterioration, and O-rings replaced as required.

\*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower.

All dimensions for reference only and subject to change.

For prompt service, Autoclave stocks select products. Consult your local representative.

## Air-to-Open - Series 30SC Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Flow Coefficient Cv**	
			1-15 (6.89-103.42)	16 (110.31)	18 (124.10)	20 (137.89)	22 (151.68)	24 (165.47)	26 (179.26)	28 (193.05)	30 (206.84)				
30SC16	X Heavy Duty	Air Pressure: psi (bar)	70 (4.76)	75 (5.10)	75 (5.10)	80 (5.44)	85 (5.78)	95 (6.46)	100 (6.80)	100 (6.80)	100 (6.80)			30,000 (2068.39)	2.61
		Spring Pre-Compression: in. (mm)	0.56 (14.22)	0.62 (15.75)	0.68 (17.27)	0.75 (19.05)	0.88 (22.35)	0.94 (23.88)	1.00 (25.40)	1.06 (26.92)	1.38 (35.05)				
		Stem Travel in (mm)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)	0.50 (12.70)				

## Series 30VM Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Flow Coefficient Cv**	
			1-10 (6.89-68.95)	12 (82.74)	14 (96.53)	16 (110.31)	18 (124.10)	20 (137.89)	22 (151.68)	24 (165.47)	26 (179.26)	28 (193.05)			30 (206.84)
30VM4	Medium Duty	Air Pressure: psi (bar)	45 (3.06)	45 (3.06)	55 (3.74)	55 (3.74)	55 (3.74)	55 (3.74)	65 (4.42)	65 (4.42)	65 (4.42)	65 (4.42)	75 (5.10)	30,000 (2068.39)	0.12
		Spring Pre-Compression: in. (mm)	0.12 (3.05)	0.12 (3.05)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.31 (7.87)		
		Stem Travel in (mm)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)		
	Heavy Duty	Air Pressure: psi (bar)	25 (1.70)	25 (1.70)	30 (2.04)	30 (2.04)	30 (2.04)	30 (2.04)	35 (2.38)	35 (2.38)	35 (2.38)	35 (2.38)	40 (2.72)		
30VM6 & 30VM9	Medium Duty	Air Pressure: psi (bar)	45 (3.06)	55 (3.74)	55 (3.74)	65 (4.42)	65 (4.42)	75 (5.10)	75 (5.10)	75 (5.10)	85 (5.78)	85 (5.78)	95 (6.46)	30,000 (2068.39)	0.33 (30VM6) 0.33 (30VM9)
		Spring Pre-Compression: in. (mm)	0.12 (3.05)	0.19 (4.83)	0.19 (4.83)	0.25 (6.35)	0.25 (6.35)	0.31 (7.87)	0.31 (7.87)	0.31 (7.87)	0.38 (9.65)	0.38 (9.65)	0.44 (11.18)		
		Stem Travel in (mm)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)		
	Heavy Duty	Air Pressure: psi (bar)	25 (1.70)	30 (2.04)	30 (2.04)	35 (2.38)	35 (2.38)	40 (2.72)	40 (2.72)	40 (2.72)	45 (3.06)	45 (3.06)	50 (3.40)		

## Series 40VM Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)								Maximum Pressure psi (bar)*	Flow Coefficient Cv**			
			1-10 (6.89-68.95)	15 (103.42)	20 (137.89)	25 (172.37)	30 (206.84)	35 (241.31)	40 (275.79)						
40VM9	Medium Duty	Air Pressure: psi (bar)	60 (4.08)	70 (4.76)	75 (5.10)	85 (5.78)	95 (6.46)	100 (6.80)	100 (6.80)					40,000 (2757.86)	0.28
		Spring Pre-Compression: in. (mm)	0.12 (3.05)	0.18 (4.57)	0.25 (6.35)	0.31 (7.87)	0.38 (9.65)	0.43 (10.92)	0.5 (12.70)						
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)						
	Heavy Duty	Air Pressure: psi (bar)	30 (2.04)	35 (2.38)	40 (2.72)	45 (3.06)	50 (3.40)	50 (3.40)	55 (3.74)						

Note: System operating pressure are shown for piston style operators. The maximum system operating pressure for some diaphragm operators is slightly reduced (approximately 10%).

\*\* Cv data is for 2-way straight valves. For angle pattern, add approximately 50% to the Cv valve.

**CAUTION:** While testing has shown O-rings to provide satisfactory service life, both cyclic and shelf life may vary widely with differing service conditions, properties of reactants, pressure and temperature cycling and age of the O-ring, FREQUENT INSPECTIONS SHOULD BE MADE to detect any deterioration, and O-rings replaced as required.

\*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower.

All dimensions for reference only and subject to change.

For prompt service, Autoclave stocks select products. Consult your local representative.

## Air-to-Open - Series 60VM Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Flow Coefficient Cv**
			1-15 (6.89-103.42)	20 (137.89)	25 (172.37)	30 (206.84)	35 (241.31)	40 (275.79)	45 (310.26)	50 (344.73)	55 (379.21)	60 (413.68)		
60VM4 & 60VM6	Medium Duty	Air Pressure: psi (bar)	55 (3.74)	65 (4.42)	65 (4.42)	65 (4.42)	75 (5.10)	75 (5.10)	85 (5.78)	85 (5.78)	85 (5.78)	95 (6.46)	60,000 (4136.79)	0.08 (60VM4)
		Spring Pre-Compression: in. (mm)	0.12 (3.05)	0.19 (4.83)	0.19 (4.83)	0.19 (4.83)	0.25 (6.35)	0.25 (6.35)	0.31 (7.87)	0.31 (7.87)	0.31 (7.87)	0.38 (9.65)		
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)		
	Heavy Duty	Air Pressure: psi (bar)	30 (2.04)	35 (2.38)	35 (2.38)	35 (2.38)	40 (2.72)	40 (2.72)	45 (3.06)	45 (3.06)	45 (3.06)	50 (3.40)	0.09 (60VM6)	
60VM9	Medium Duty	Air Pressure: psi (bar)	55 (3.74)	65 (4.42)	65 (4.42)	75 (5.10)	75 (5.10)	85 (5.78)	95 (6.46)	95 (6.46)	95 (6.46)	95 (6.46)	60,000 (4136.79)	0.14
		Spring Pre-Compression: in. (mm)	0.12 (3.05)	0.19 (4.83)	0.19 (4.83)	0.25 (6.35)	0.25 (6.35)	0.31 (7.87)	0.38 (9.65)	0.38 (9.65)	0.44 (11.18)	0.50 (12.70)		
		Stem Travel in (mm)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.25 (6.35)	0.19 (4.83)	0.12 (3.05)		
	Heavy Duty	Air Pressure: psi (bar)	30 (2.04)	35 (2.38)	35 (2.38)	40 (2.72)	40 (2.72)	45 (3.06)	50 (3.40)	50 (3.40)	50 (3.40)	50 (3.40)		

## Series 100VM and 150V Valves

Valve Series	Operator Duty		System Pressure KSI (Mpa)										Maximum Pressure psi (bar)*	Flow Coefficient Cv**
			1-20 (6.89-137.89)	40 (275.79)	60 (13.68)	80 (551.57)	90 (620.52)	100 (689.46)	125 (861.83)	150 (1034.20)				
100VM5	Heavy Duty	Air Pressure: psi (bar)	35 (2.41)	40 (2.76)	50 (3.45)	60 (4.14)	70 (4.83)	70 (4.83)					100,000 (6894.65)	0.09 to 0.07***
		Spring Pre-Compression: in. (mm)	0.12 (3.05)	0.19 (4.83)	0.25 (6.35)	0.31 (7.87)	0.38 (9.65)	0.38 (9.65)						
		Stem Travel in (mm)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)						
150V5	Heavy Duty	Air Pressure: psi (bar)	30 (2.04)	40 (2.72)	45 (3.06)	55 (3.74)	60 (4.08)	60 (4.08)	70 (4.76)	75 (5.10)			150,000 (10341.97)	0.06
		Spring Pre-Compression: in. (mm)	0.12 (3.05)	0.19 (4.83)	0.25 (6.35)	0.31 (7.87)	0.38 (9.65)	0.38 (9.65)	0.44 (11.18)	0.56 (14.22)				
		Stem Travel in (mm)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.12 (3.05)	0.06 (1.52)				

Note: System operating pressure are shown for piston style operators. The maximum system operating pressure for some diaphragm operators is slightly reduced (approximately 10%).

\*\*  $C_v$  data is for 2-way straight valves. For angle pattern, add approximately 50% to the  $C_v$  valve.

\*\*\*  $C_v$  varies because of spring compression limitations. The flow coefficient range is given for the maximum stem travel (lowest system pressure) to minimum travel (highest system pressure).

**CAUTION:** While testing has shown O-rings to provide satisfactory service life, both cyclic and shelf life may vary widely with differing service conditions, properties of reactants, pressure and temperature cycling and age of the O-ring, FREQUENT INSPECTIONS SHOULD BE MADE to detect any deterioration, and O-rings replaced as required.

\*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower.

All dimensions for reference only and subject to change.

For prompt service, Autoclave stocks select products. Consult your local representative.

